


# MERCURO

- Polyester blackout fabric with a slight texture and reliable hanging characteristics
- Oeko-Tex® Standard 100 certified, free from harmful substances

## APPLICATIONS



Width < 260 cm:  
Dim-out blinds  
Not suitable: SG  
4905

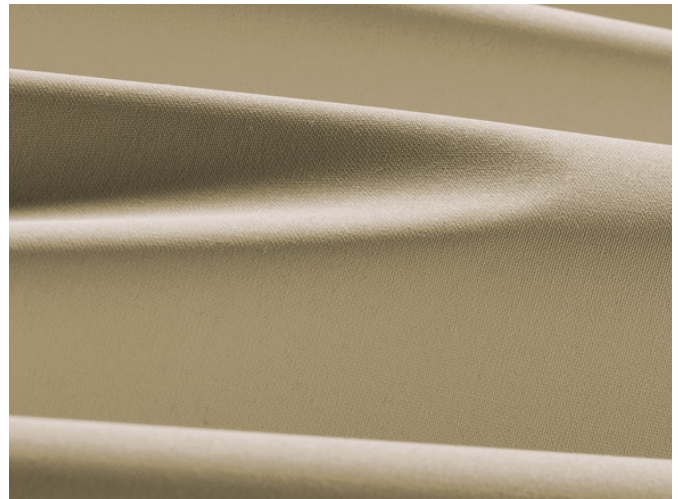

## FABRIC PROPERTIES



Blackout



Polyester acrylic-coated



340 g/m<sup>2</sup>



0.38 mm



235 cm, 295 cm (01, 04, 28, 35, 44)



8.9 cm, 12.7 cm, 240 cm, 300 cm (01, 04, 28, 35, 44)

## FEATURES / TECHNICAL PROPERTIES



5-6



Flame retardant



Digital printing



Oeko-Tex



Special colours from 500 m

## WASHING INSTRUCTIONS



## FLAME RETARDANT

B-s2,d0 (EN 13501-1)  
B1 (DIN 4102-1)  
M1 (NF P 92-503/5/7)  
Type B (BS 5867-2)  
NFPA 701



**Mercurio**
**OPTICAL AND SOLAR COEFFICIENTS ( $\pm 5\%$ , DIN EN 410)**

Colour	$R_s$	$A_s$	$F_c$	$g_{tot}$
<b>01</b>	66.0	34.0	0.50	0.36
<b>04</b>	71.0	29.0	0.46	0.33
<b>28</b>	69.0	31.0	0.48	0.34
<b>33</b>	71.0	29.0	0.47	0.34
<b>35</b>	71.0	29.0	0.46	0.33
<b>44</b>	70.0	30.0	0.49	0.34


 $R_s$  Solar reflectance

 $A_s$  Solar absorption

 $F_c$  Shading factor

 $g_{tot}$  Total g-value

 $F_c + g_{tot}$ : Value calculated with glass:  $0.72 / U_g = 1.6 \text{ W/m}^2 \text{ K}$ , DIN EN 13363-1

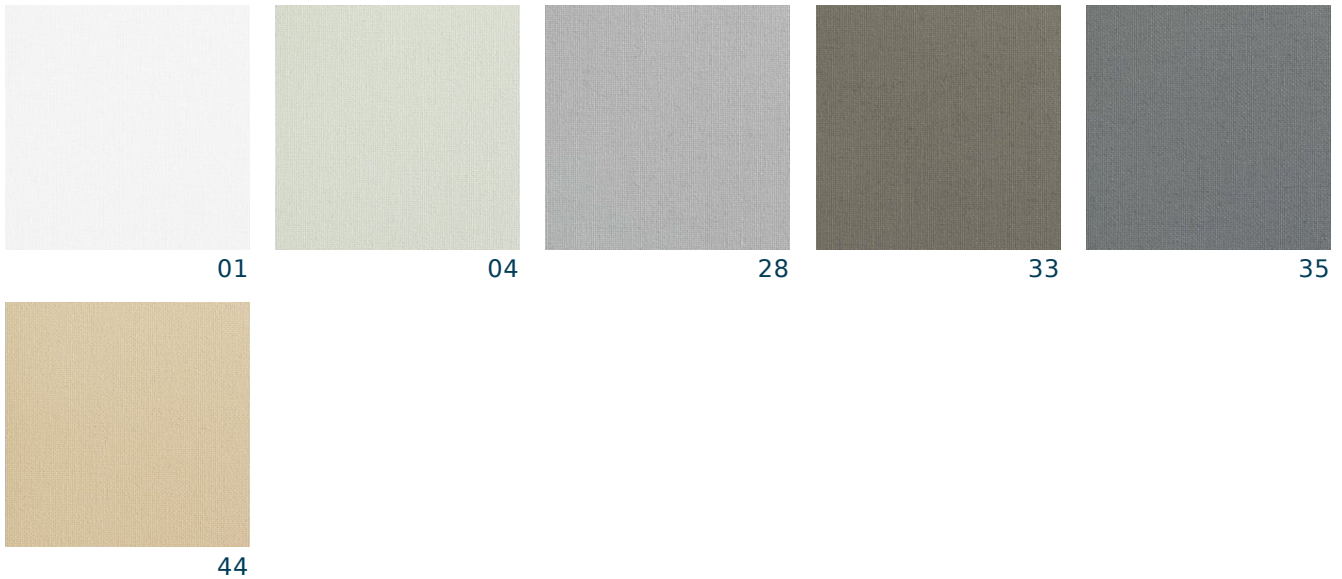**Mercurio**


Colours shown are not binding