

SKR26 Overhead Corded

Roller Blinds



SKR26 Overhead Corded

Features:

The SKR26 overhead corded roller blind comes with a pull-cord and pulleys as standard. White plastic brackets for face or top fixing with 25mm aluminium barrel or white metal brackets for 57mm aluminium barrel, and strong, constant tension spring mechanism. The fabric is bonded onto the barrel, and features a white Tear Drop aluminium bottom bar. There is a pull-cord with cleat, and pulleys for single or double-corded operation.

Benefits:

Ideal for relatively inaccessible locations, the SKR26 utilises tried and tested spring components and simple manual operation. Subject to size limitations, it is able to cope with sloping or even horizontal roof windows. The fabric is bonded to the barrel and locked into the bottom bar, and supported by sturdy brackets.

Options:


Tear Drop aluminium bottom bar in black or silver.

Specification:

SKR26 overhead corded roller blind with constant tension spring mechanism. Complete with pull-cord, cleat and pulleys for overhead operation, supported by sturdy white brackets. Flame retardant fabric from the SK range, on aluminium barrel with spring operation for single or double-handed use. Complete with pull-cord, cleat and pulleys for overhead operation.

Roller Blind Specification Guide

Model	Min Width	Max Width	Max Drop	Max M ²
SKR26-25 Overhead Corded	500	1850	1850	3.5
SKR26-57 Overhead Corded	720	2500	2850	5.0

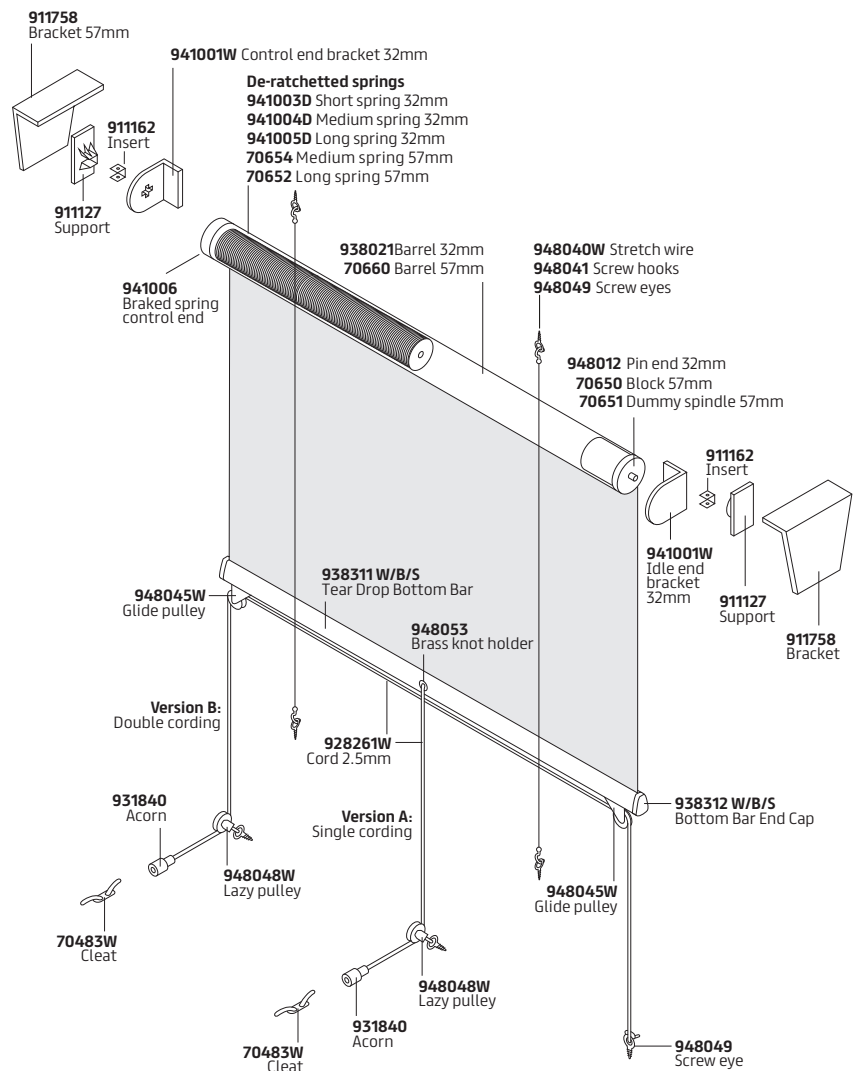

This product range comes with a full Lifetime Warranty as standard.