



SolKomfort Interiors®

ATLANTEX & ATLANTEX ASC

Vertical & Roller Blind Fabric Specification

ATLANTEX

FIRE RETARDANT
ANTI-MILDEW COATING

ATLANTEX ASC

FIRE RETARDANT
ANTI-MILDEW COATING
ADVANCED SOLAR CONTROL COATING

ATLANTEX & ATLANTEX ASC

Vertical & Roller Blind Fabric Specification

Atlantex



Atlantex asc

KEY FEATURES:

- Fabric composition:** 100% Polyester
- Fire retardancy:** Conforms to; EN 13773 : 2003 Class 1; BS5867 - 2, Type B : 2008 for fire retardancy when tested in accordance with BS5438 : 1989
- Shading:** Atlantex: Dimout - Recommended for computer environments
Atlantex asc: Dimout & Reflective - Recommended for computer environments
- Moisture resistance:** Acticide Coated - Recommended for moist conditions

STANDARD SPECIFICATIONS:

- Colour range:** 14
- Louvre widths available:** 89mm (3^{1/2}"); 127mm (5")
- Roller fabric width:** 200cm: nominal (78.7")
- Typical fabric weight:** Atlantex: 240gsm - (+/-10)
Atlantex asc: 255gsm - (+/-10)
- Fabric thickness:** 0.50mm - nominal
- Colourfast:** Conforms to: BS5867 - 1 : 2004 for light fastness to Grade 6 minimum when tested in accordance with ISO 105 - B02 : 1999
- Care instructions:** Wipe with damp sponge; Do not wash; Do not tumble dry;
Do not Dry Clean: Do not iron

ATLANTEX

Colour	%Heat		%Light		S-C
	T	R	T	R	
Beige	15	65	13	70	0.33
Black	0	5	0	6	0.83
Blue	8	45	3	39	0.49
Cherry	3	22	0	13	0.68
Cream	19	71	19	80	0.28
Dark Beige	8	50	6	53	0.45
Dark Blue	5	26	0	10	0.65
Grey	1	15	0	16	0.74
Navy	5	26	0	9	0.65
Pewter	12	53	3	39	0.43
Silver	11	51	8	55	0.44
Stone	13	79	10	89	0.20
Vanilla	18	70	19	81	0.29
White	18	74	16	84	0.25


ATLANTEX ASC

Colour	%Heat		%Light		S-C
	T	R	T	R	
Beige	14	66	12	71	0.32
Black	0	26	0	30	0.64
Blue	5	51	1	49	0.43
Cherry	3	69	0	13	0.27
Cream	16	76	14	85	0.23
Dark Beige	7	70	5	80	0.27
Dark Blue	3	68	0	78	0.28
Grey	0	28	0	33	0.62
Navy	3	68	0	78	0.28
Pewter	0	29	0	35	0.62
Silver	9	72	8	82	0.26
Stone	16	74	15	84	0.25
Vanilla	16	76	14	85	0.23
White	13	78	13	87	0.21


T = Transmitted : R = Reflected : S-C = Shading Co-efficient. Shading Co-efficients are expressed as a decimal between 0 and 1. The lower the figure, the higher the shading efficiency of the blind.

This data is based on: Tests conducted using double glazed 6mm float glass with 12mm air space. Blinds are fully closed. Shading co-efficients are calculated for radiation at normal incidence. Standard U value is 2.75 W/M2K = 0.49Btu/ft2hx°F.


Important: Performance data has been compiled with great care using the latest techniques. However it is advisable to check actual suitability of fabrics for a particular application before use. In line with Eclipse's commitment to product development, specifications may be subject to change without notice.

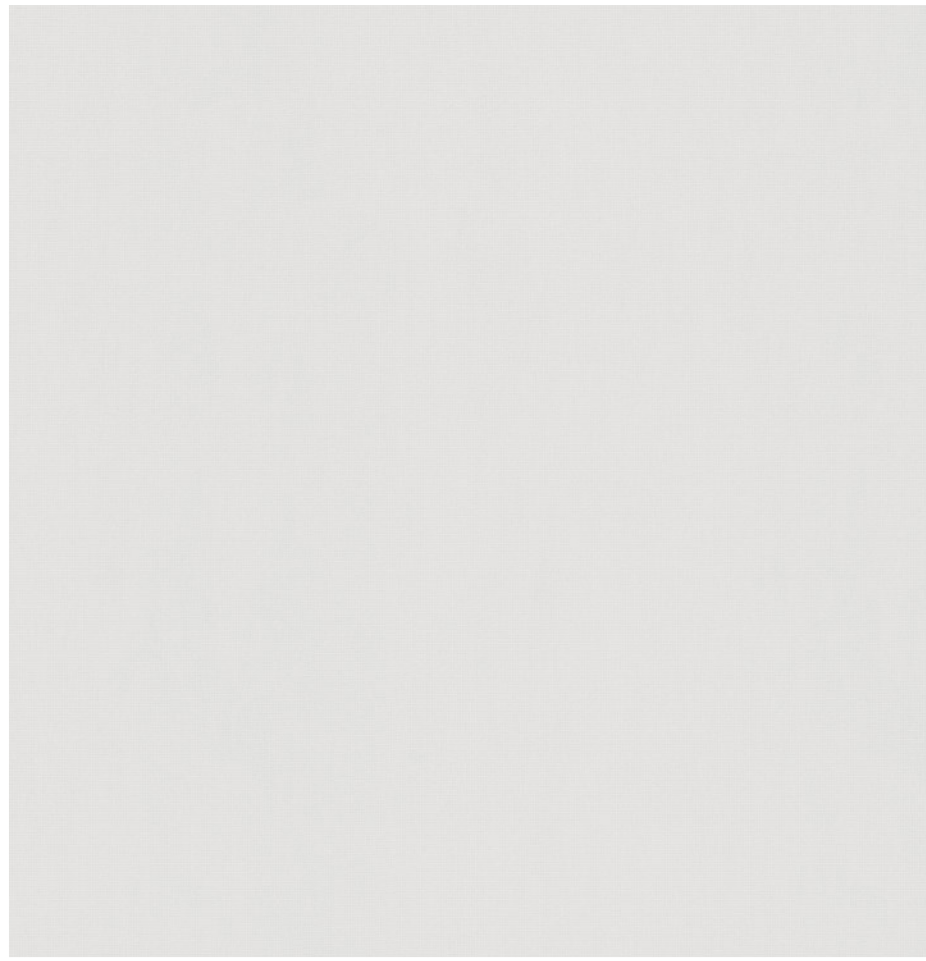

Atlantex White

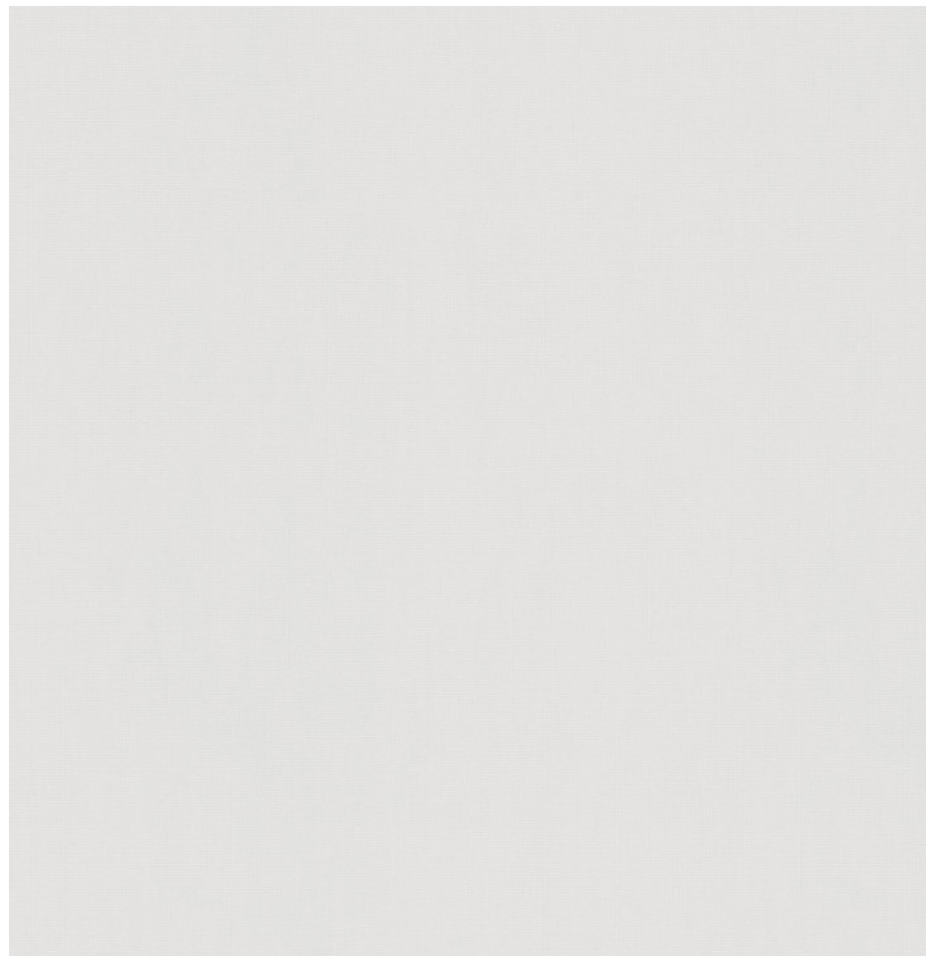


Atlantex asc White

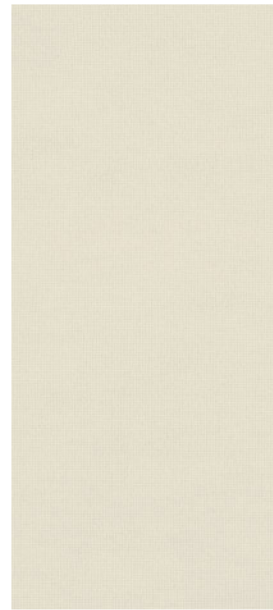


Vanilla




Cream

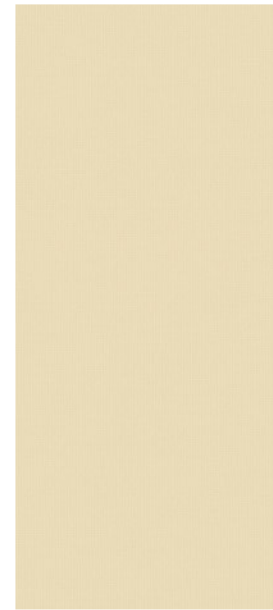

Beige

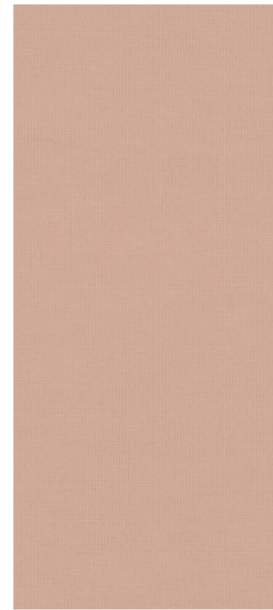


Dark Beige

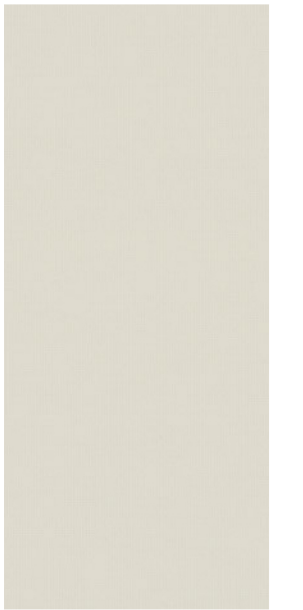


Stone




Cherry

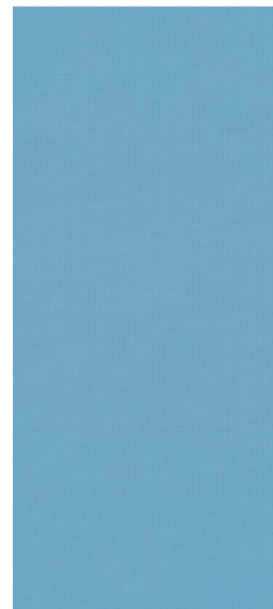


Blue

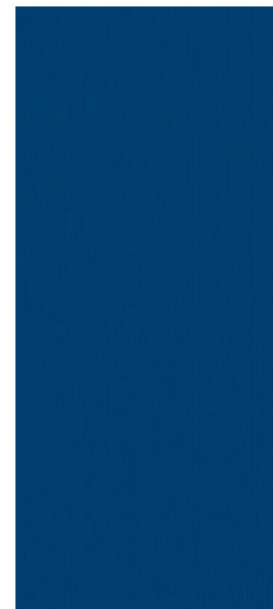


Dark Blue

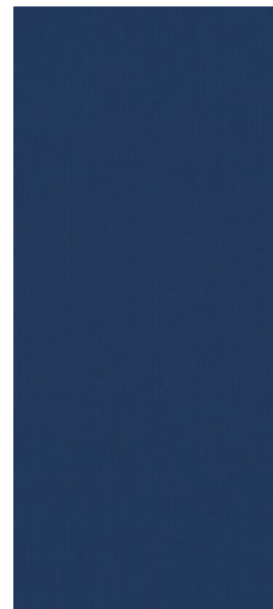


Navy

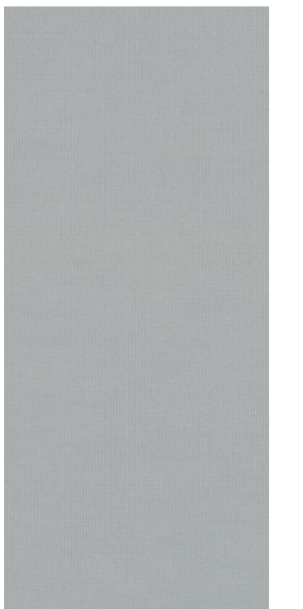


Silver

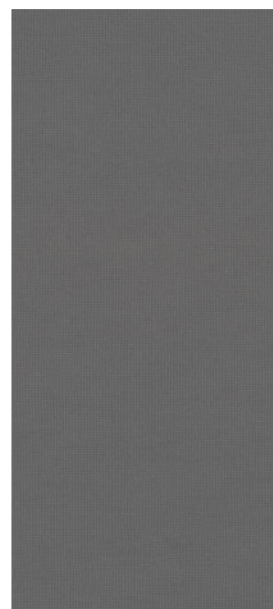

Grey

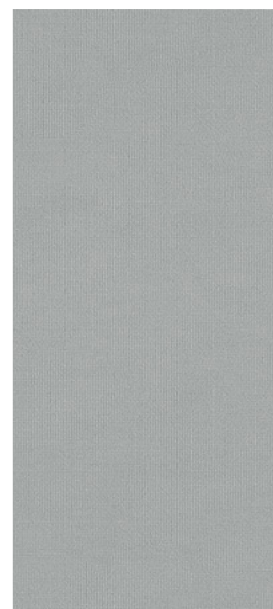

Pewter

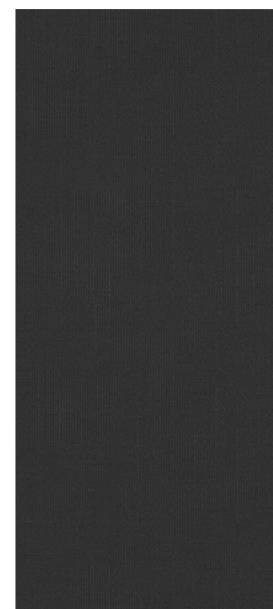

Black