


## FUNCTION

- Fabric woven to widths 8.9 cm and 12.7 cm
- Smooth edges for optimal hanging performance for vertical blinds
- Proven acoustic properties

## APPLICATIONS

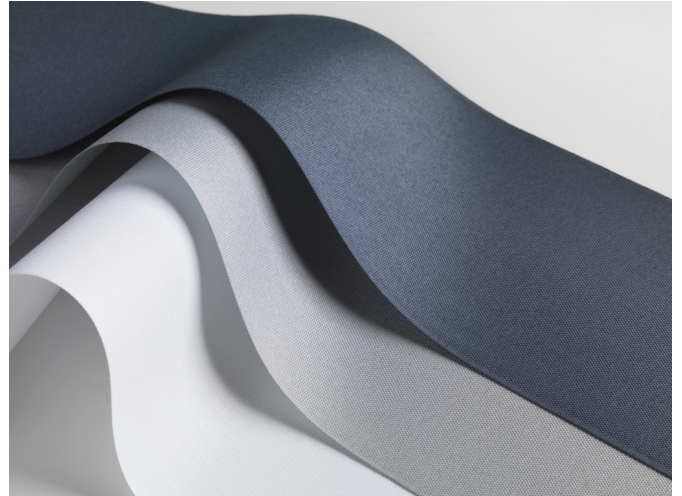

## FABRIC PROPERTIES

 Semi transparent

 Polyester

 275 g/m<sup>2</sup>

 0.47 mm

 8.9 cm, 12.7 cm

## FEATURES / TECHNICAL PROPERTIES

 4-5

 Alpha-w = 0.60

 Flame retardant

 Applicable in humid areas

 Special colours from 5'000 m

## WASHING INSTRUCTIONS



## FLAME RETARDANT

Class 1 (EN 13773)

Class 1 (UNI 9176/77)

Type B (BS 5867-2)



**Function**
**OPTICAL AND SOLAR COEFFICIENTS ( $\pm 5\%$ , DIN EN 410)**

| Colour    | $T_V$ | $T_S$ | $R_S$ | $A_S$ | $T_{UV}$ | $F_C$ | $g_{tot}$ |
|-----------|-------|-------|-------|-------|----------|-------|-----------|
| <b>01</b> | 32.3  | 31.4  | 63.8  | 4.8   | 18.3     | 0.54  | 0.39      |
| <b>03</b> | 24.2  | 28.1  | 62.2  | 9.7   | 15.4     | 0.54  | 0.39      |
| <b>13</b> | 30.5  | 31.2  | 65.4  | 3.4   | 29.2     | 0.53  | 0.38      |
| <b>16</b> | 30.1  | 28.7  | 56.7  | 14.6  | 8.5      | 0.58  | 0.42      |
| <b>26</b> | 11.5  | 22.1  | 43.9  | 34.0  | 4.9      | 0.66  | 0.47      |
| <b>29</b> | 11.8  | 22.7  | 50.8  | 26.5  | 8.0      | 0.61  | 0.44      |
| <b>54</b> | 2.8   | 18.7  | 37.0  | 44.3  | 2.9      | 0.70  | 0.50      |
| <b>72</b> | 4.1   | 19.3  | 38.6  | 42.1  | 4.6      | 0.69  | 0.50      |

 $T_V$  Visible light transmission

 $R_S$  Solar reflectance

 $T_{UV}$  UV transmission


 $g_{tot}$  Total g-value

 $T_S$  Solar transmission

 $A_S$  Solar absorption

 $F_C$  Shading factor

 $F_C + g_{tot}$ : Value calculated with glass:  $0.72 / U_g = 1.6 \text{ W/m}^2 \text{ K}$ , DIN EN 13363-1

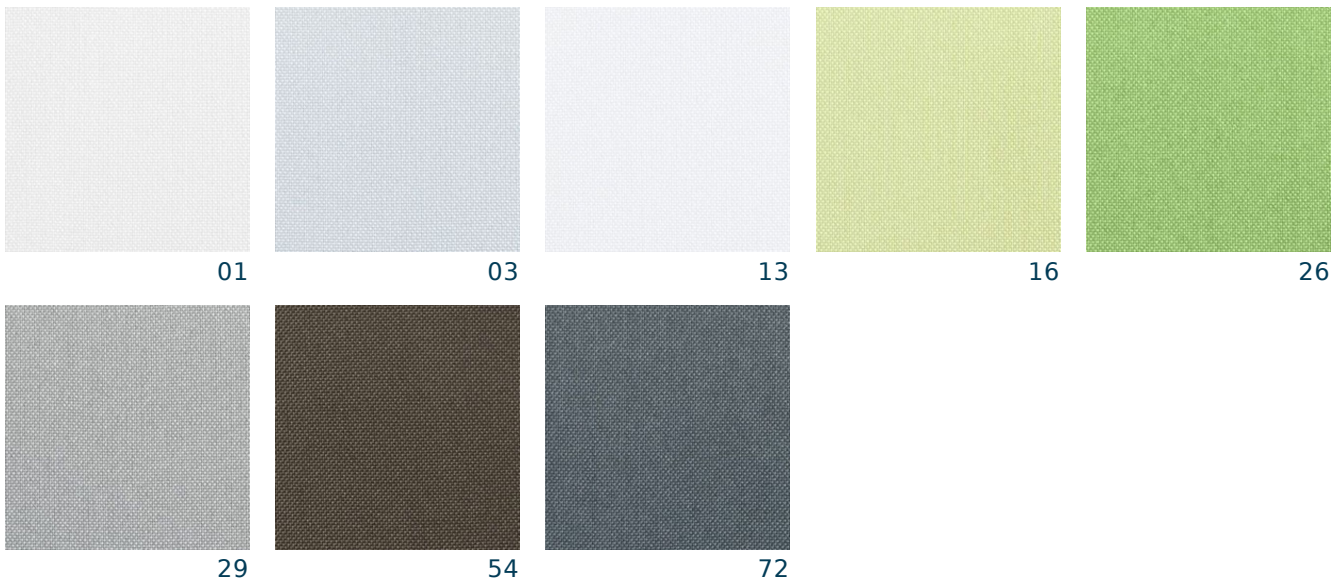**Function**


Colours shown are not binding