

sol
komfort
interiors®

AUSTIN FR

Roller Blind Fabric Specification

WIDE WIDTH

FIRE RETARDANT

AUSTIN FR

Roller Blind Fabric Specification

KEY FEATURES:

- Fabric composition:** 100% Polyester, PVC Free, Halogen Free
- Fire retardancy:** DIN 4102 - B1; BS5867 - 2, Type B : 2008 for fire retardancy when tested in accordance with BS5438 : 1989
- Shading:** Standard Shading - Suitable for computer environments
- Moisture resistance:** Suitable for moist conditions



STANDARD SPECIFICATIONS:

- Colour range:** 5
- Louvre widths available:** N/A
- Roller fabric width:** 300cm (118") nominal
- Typical fabric weight:** 230gsm (+/-10)
- Fabric thickness:** 0.38mm - nominal
- Colourfast:** Conforms to: BS5867 - 1 : 2004 for light fastness to Grade 6 minimum when tested in accordance with ISO 105 - B02 : 1999
- Care instructions:** Wipe with damp sponge

AUSTIN FR

Colour	%Heat		%Light		S-C
	T	R	T	R	
Snow	27	60	26	71	0.38
Linen	27	67	23	77	0.32
Dove Grey	24	58	23	67	0.40
Ash	4	36	1	38	0.56
Graphite	0	9	0	10	0.79

This data is based on:
Tests conducted using double glazed 6mm float glass with 12mm air space. Blinds are fully closed.

Shading co-efficients are calculated for radiation at normal incidence. Standard U value is 2.75 W/M2K = 0.49Btu/ft2hx°F.


T = Transmitted : R = Reflected : S-C = Shading Co-efficient. Shading Co-efficients are expressed as a decimal between 0 and 1. The lower the figure, the higher the shading efficiency of the blind.

Important: Performance data has been compiled with great care using the latest techniques. However it is advisable to check actual suitability of fabrics for a particular application before use.


In line with Eclipse's commitment to product development, specifications may be subject to change without notice.

AUSTIN FR


Roller Blind Fabric Specification

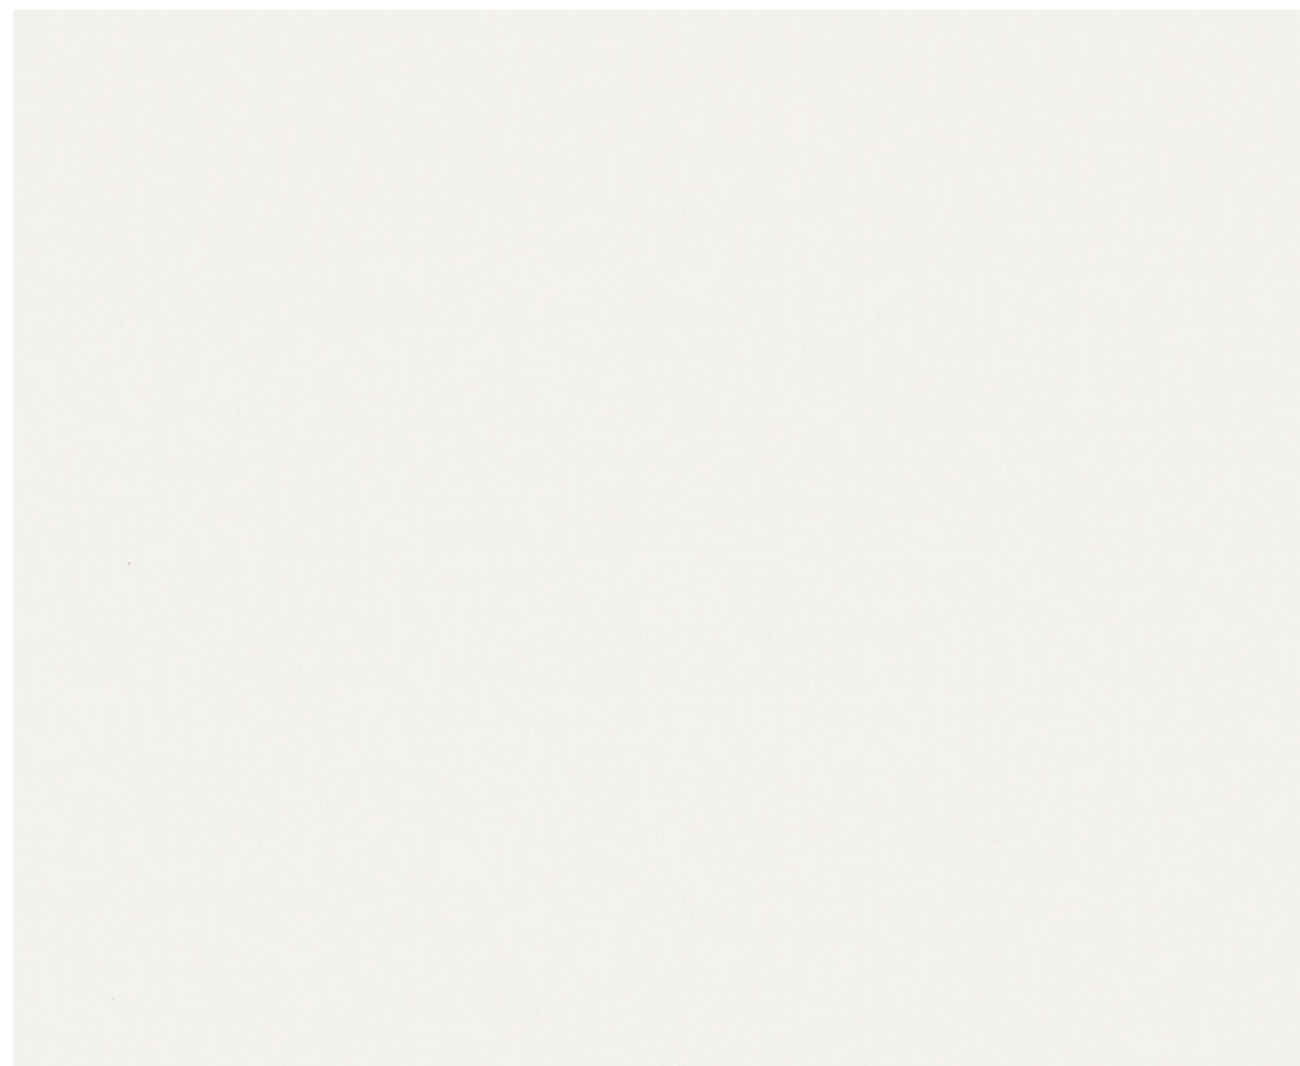


Snow

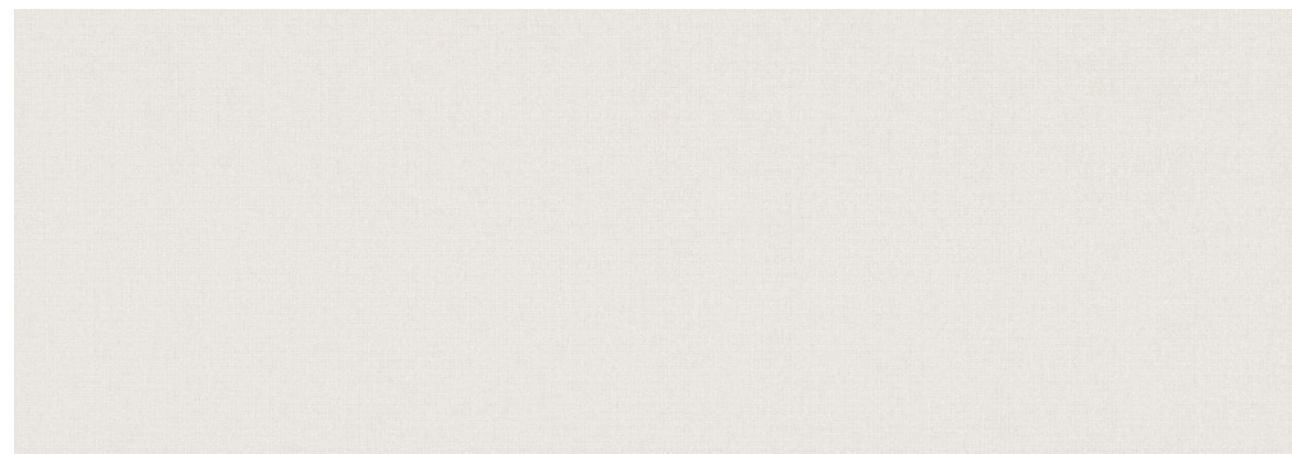


Dove Grey

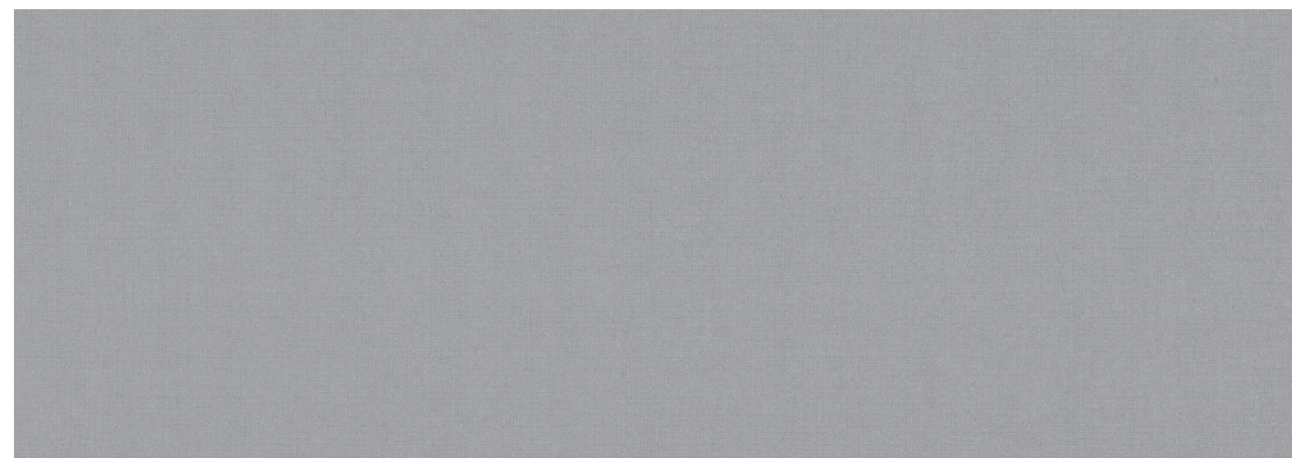

Ash

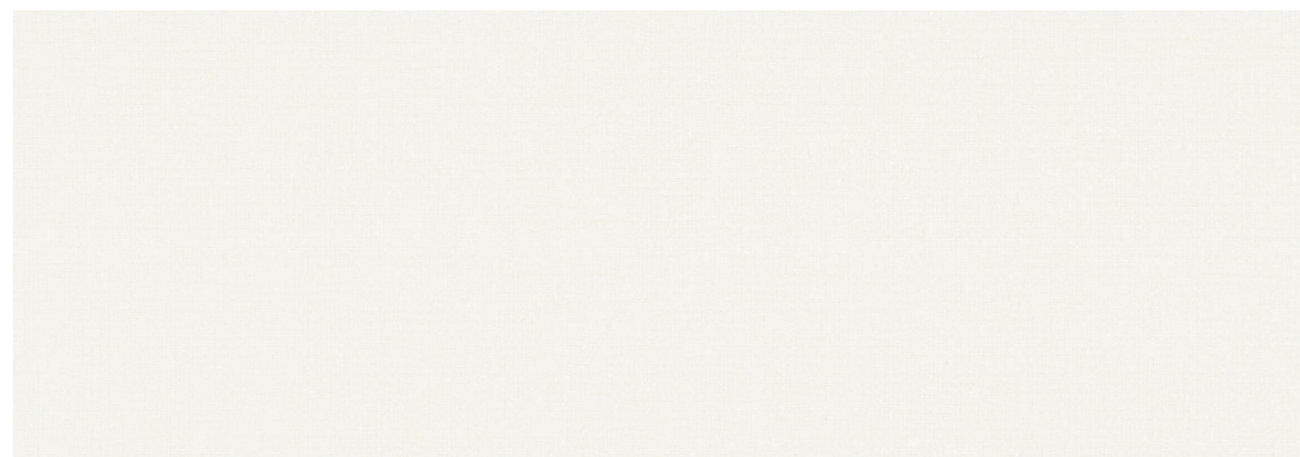

Linen

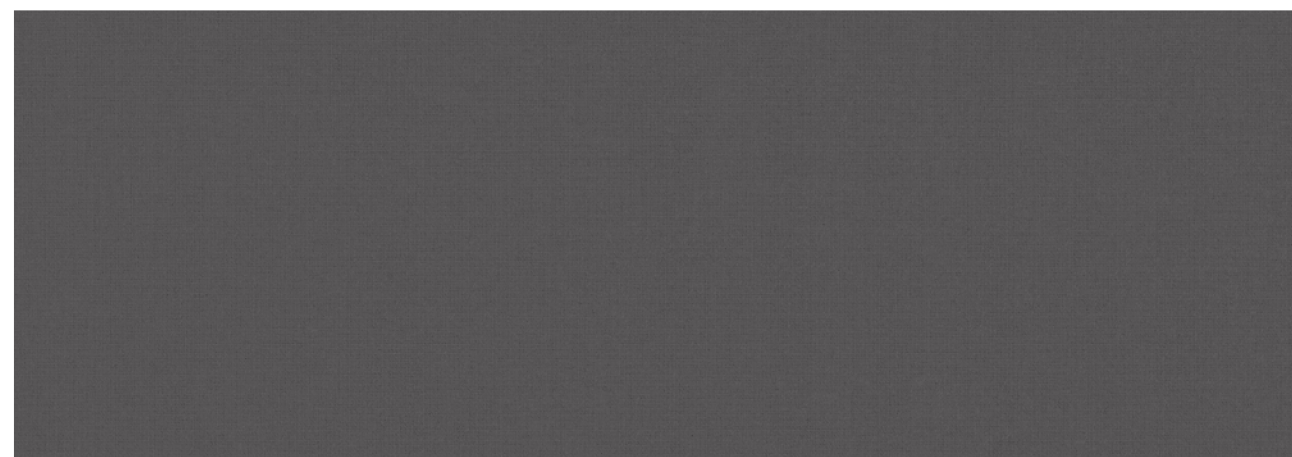

Graphite