



sol
komfort
interiors®

WHISPER 3%

Roller Blind Fabric Specification

WHISPER 3%
WIDE WIDTH
FIRE RETARDANT
SCREEN FABRIC

WHISPER 3%

Roller Blind Fabric Specification

KEY FEATURES:

- Fabric composition:** 75% PVC, 25% Polyester
Fire retardancy: Conforms to; BS5867 - 2, Type B : 2008 for fire retardancy when tested in accordance with BS5438 : 1989
Shading: Screen - Recommended for computer environments
Moisture resistance: Recommended for moist conditions



STANDARD SPECIFICATIONS:

- Colour range:** 6
Louvre widths available: N/A
Roller fabric width: 250cm: nominal (98.4")
Typical fabric weight: 465gsm - (+/-10)
Fabric thickness: 0.66mm - nominal
Colourfast: Conforms to: BS5867 - 1 : 2004 for light fastness to Grade 6 minimum when tested in accordance with ISO 105 - B02 : 1999
Care instructions: Wipe with damp sponge; Do not wash; Do not tumble dry; Do not Dry Clean: Do not iron

Colour	%Heat		%Light		S-C
	T	R	T	R	
White	18	70	15	72	0.28
White Linen	15	59	11	63	0.38
White Pearl	14	52	11	57	0.44
White Grey	9	40	7	44	0.53
Black Pearl	4	13	4	15	0.76
Black	3	3	3	3	0.85


T = Transmitted : R = Reflected : S-C = Shading Co-efficient. Shading Co-efficients are expressed as a decimal between 0 and 1. The lower the figure, the higher the shading efficiency of the blind.

This data is based on:
Tests conducted using double glazed 6mm float glass with 12mm air space. Blinds are fully closed.

Shading co-efficients are calculated for radiation at normal incidence. Standard U value is 2.75 W/M2K = 0.49Btu/ft2hx°F.

Important: Performance data has been compiled with great care using the latest techniques. However it is advisable to check actual suitability of fabrics for a particular application before use.


In line with Eclipse's commitment to product development, specifications may be subject to change without notice.




White




White Grey



White Linen

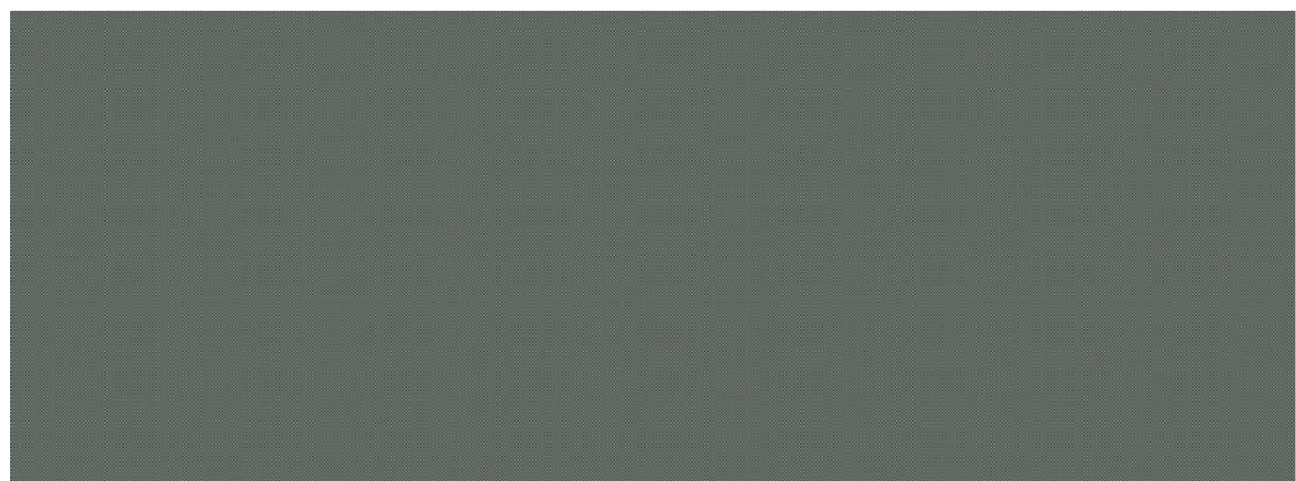

Black Pearl

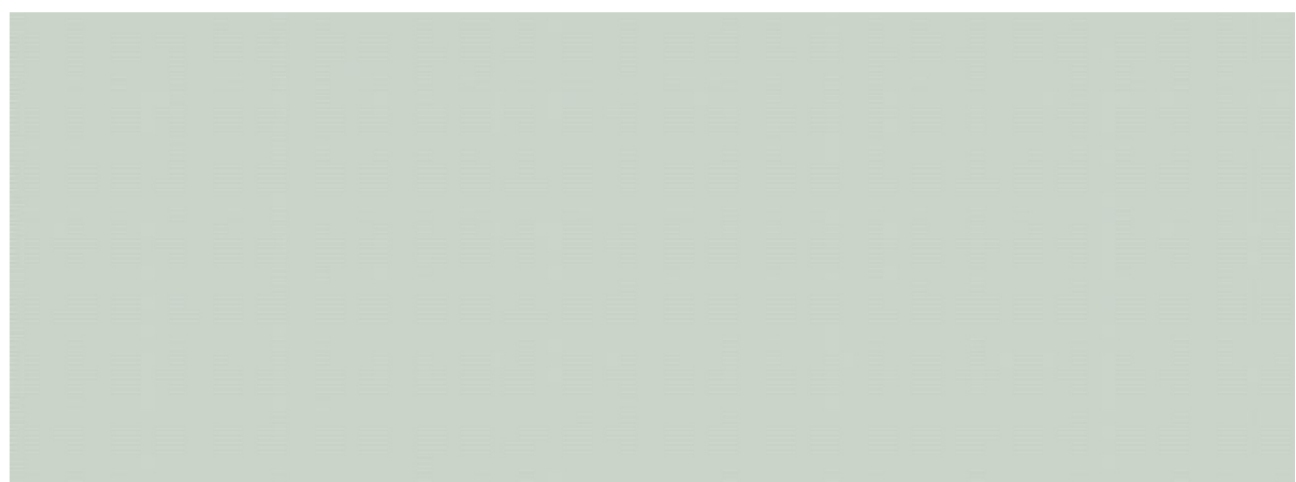

White Pearl



Black