


## NOX

- Polyester blackout fabric with a colour matched reverse for a uniform appearance inside and out
- Oeko-Tex® Standard 100 certified, free from harmful substances

### APPLICATIONS



Width < 260 cm:  
Dim-out blinds  
Not suitable: SG  
4905

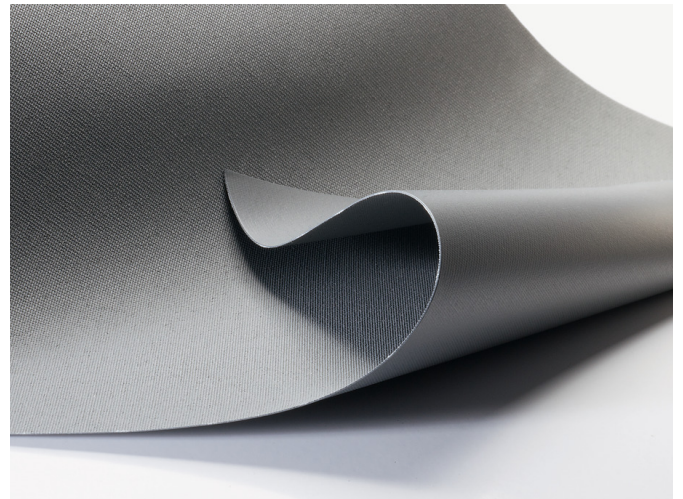

### FABRIC PROPERTIES

 Blackout

 Polyester acrylic-coated

 340 g/m<sup>2</sup>

 0.44 mm

 ← max. → 295 cm

 300 cm

### FEATURES / TECHNICAL PROPERTIES

 5-6

 Flame retardant

 Digital printing

 Oeko-Tex

 Special colours from 1'000 m

### WASHING INSTRUCTIONS



### FLAME RETARDANT

B1 (DIN 4102-1)

Type B (BS 5867-2)

B-s2,d0 (EN 13501-1)



**Nox**
**OPTICAL AND SOLAR COEFFICIENTS ( $\pm 5\%$ , DIN EN 410)**

Colour	$R_s$	$A_s$	$F_c$	$g_{tot}$
1	72.0	28.0	0.46	0.33
2	70.0	30.0	0.47	0.34
3	49.0	51.0	0.61	0.44
4	44.0	56.0	0.64	0.46
5	17.0	83.0	0.81	0.58
6	5.0	95.0	0.89	0.64


 $R_s$  Solar reflectance

 $A_s$  Solar absorption

 $F_c$  Shading factor

 $g_{tot}$  Total g-value

 $F_c + g_{tot}$ : Value calculated with glass:  $0.72 / U_g = 1.6 \text{ W/m}^2 \text{ K}$ , DIN EN 13363-1

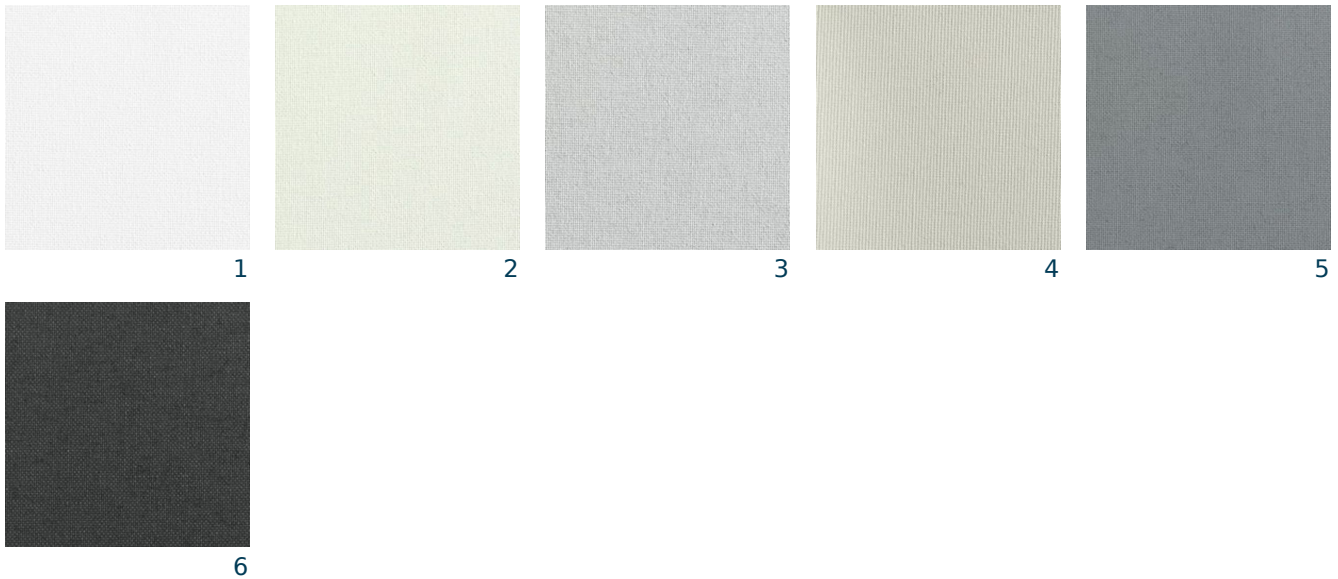**Nox**


Colours shown are not binding