

V L60 Mono

Vertical Blinds



4, VL60 Mono

Features:

The 4,VL60 vertical blind has a 45 x 36.5mm white aluminium head-rail with top-fix brackets and wheeled carrier trucks. The constant transport of the louvres is guaranteed by a precise aluminium spindle shaft. Mono control operation by metal control chain with built in slip clutch for both louvre tilt and draw. Louvres are supplied in 127mm and 89mm widths with weights and white stabilising chain.

Benefits:

The 4,VL60 offers the ease of mono control - a comfortable gear change mechanism with large chain wheel caters for continuous transport and automatically switches from tilting to traversing. By pulling the metal ball chain the louvres tilt and then traverse. The strong head-rail and the wheeled carrier trucks are designed to withstand the rigours of intensive use, whilst the ingenious mechanism allows precise control of light transmission. A robust, long-lasting blind, and one that is delightfully simple to operate.

Options:

4,VL60S sloping head-rail versions; Face fix brackets; Extension brackets; Enclosed weights.

Specification:


The 4,VL60 mono vertical blind with chain control. 45 x 36.5mm white powder-coated aluminium head-rail with mono control by metal control chain. 127/ 89mm louvres in flame retardant fabric from the 4, range, complete with louvre weights and white stabilising chain.

Vertical Blind Specification Guide

Model	Min Width	Max Width	Max Drop	Max M ²
4,VL60 Mono control	300	4550	3200	14.5

Based on fabric weight of 220g/m², e.g. Thames. Use of heavier fabrics may require appropriate reductions.

BIM model available

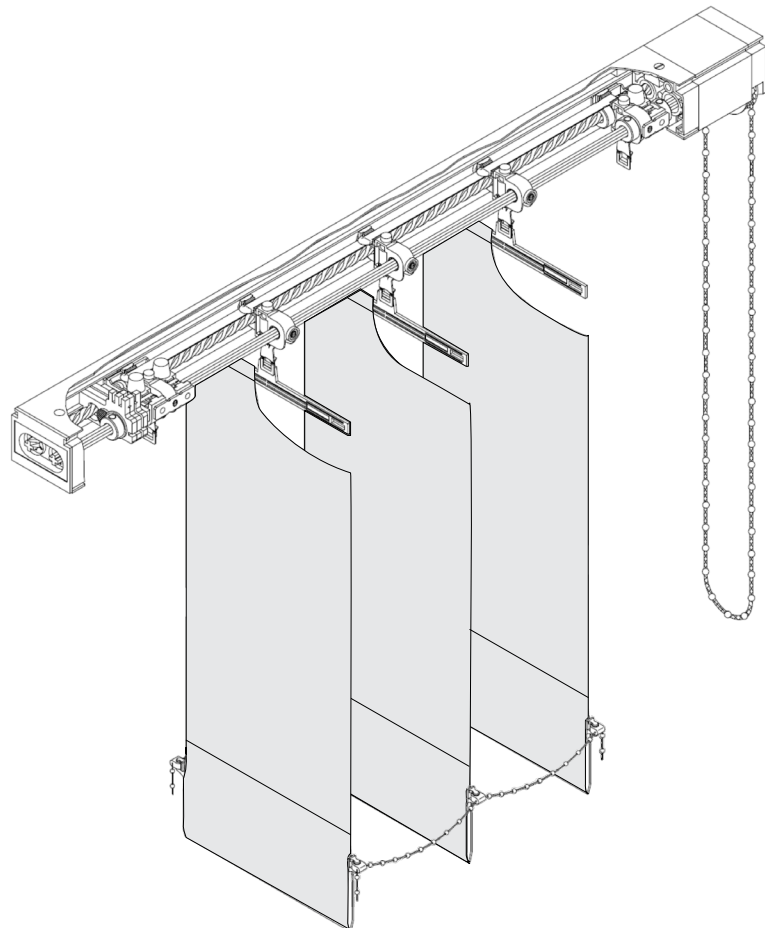

This product range comes with a full Lifetime Warranty as standard.